


## **PRODUCT SPECIFICATIONS**

Product	Matte Gold NeXT Generation 26 (MYGNXT26)
Code	LFGMYGNXT26
Colour	Matte Gold
Length	5.6m
Width	100mm
Depth	26mm
Material	Anodised Aluminium
Applications	Indoor and Outdoor
Features	<ul> <li>No tracking</li> <li>Choice of waste outlets</li> <li>Joiners for easy extension</li> <li>Easy roll out feature for cleaning and maintenance</li> <li>Lifetime Rustproof Warranty</li> <li>UV Stable</li> </ul>



<sup>\*</sup> Total length is 5.8m, total usable length is 5.6m to allow for any wastage during the anodising process.

Warranty information and Care & Maintenance can be found at www.lauxesgrates.com.au

*Disclaimer:* All Lauxes grates and accessories hold WaterMark Certification in accordance with WMTS - 040.


<sup>\*</sup> Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.

## **CUTTING INSTRUCTIONS AND INSTALLATION**

For ease of cutting Lauxes grates, we recommend using a compound mitre saw fitted with a multi-material cutting blade 80 tooth or more. We also recommend using a Lauxes TCT hole saw to drill the hole for the waste outlet.

- 1. Cut the bottom tray 3mm shorter than desired length to allow end caps to be fitted.
- 2. Cut the top grate 1mm shorter than the bottom tray to allow for easy roll-in of top grate and tidy fit.

- 3. Using a suitable size Lauxes hole saw for your pop waste, drill out the hole at the required position to align with the waste pipe in the floor.
- 4. Insert the end caps into bottom tray and secure with a bead of silicone on the outside of tray.
- 5. Place silicone around the lip of the pop waste and secure to the underside of bottom tray at the recently drilled hole.
- \* During installation use a template to ensure the grate does not come in contact with any wet cement based products.

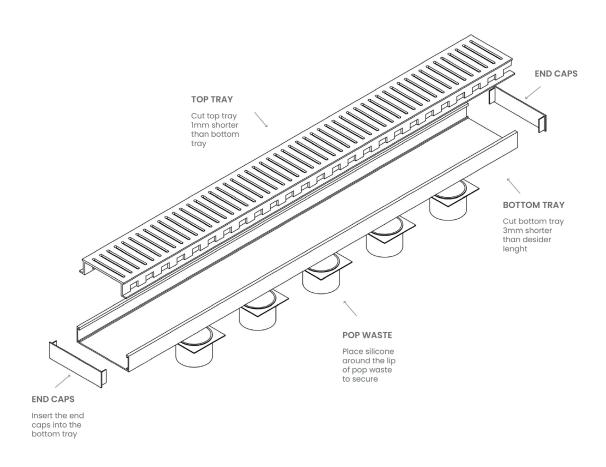

Installation to be by a licensed plumber and in accordance with AS/NZS 3500.2.