

EAGLE

ACOUSTIC
PANELS

SOUND
PROFILE

NRC 0.65
-0.75



CONTENTS	
Eagle in Use	02
Profile Options	05
Finishes	06
Substrates	07
Recommended Fixing Methods	08
Compliance	09
Build Your Specification	10

Eagle brings a luxurious linear look to contemporary spaces, this exquisite panelling system transforms the acoustic allure of any boardroom, workspace, hospital walkway, or hotel lobby. The options are limitless.

Manufactured using high-end MDF, these stylish panels will embellish your architectural design with a continuous grooved design.

Coupled with DecorSorb, it sets the architectural acoustic standard Decor Systems is renowned for.



BARWON HEALTH NORTH
BILLARD LEECE



BRIGHTON SECONDARY COLLEGE
THOMSON ROSSI




GREEN MOUSTACHE RESTAURANT
REDWAH INTERIOR DESIGN STUDIO


EAGLE OPTIONS


SOUND
PROFILE


NRC 0.65
-0.75



01 – PROFILE

	
10CPD30	SLAT WIDTH 30MM SPACING 10MM OPEN AREA 13.33%

	
10CPD40	SLAT WIDTH 40MM SPACING 10MM OPEN AREA 20%

	
10CPD50	SLAT WIDTH 50MM SPACING 10MM OPEN AREA 11%

	
10CPD60	SLAT WIDTH 60MM SPACING 10MM OPEN AREA 16%

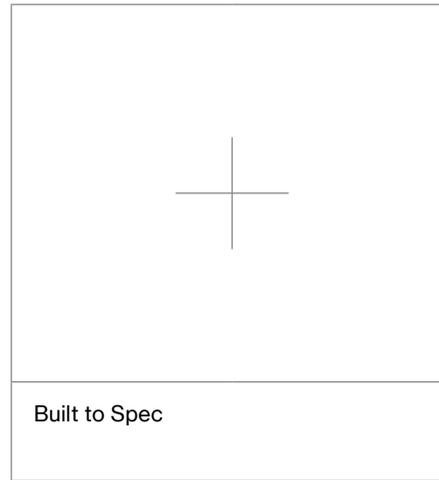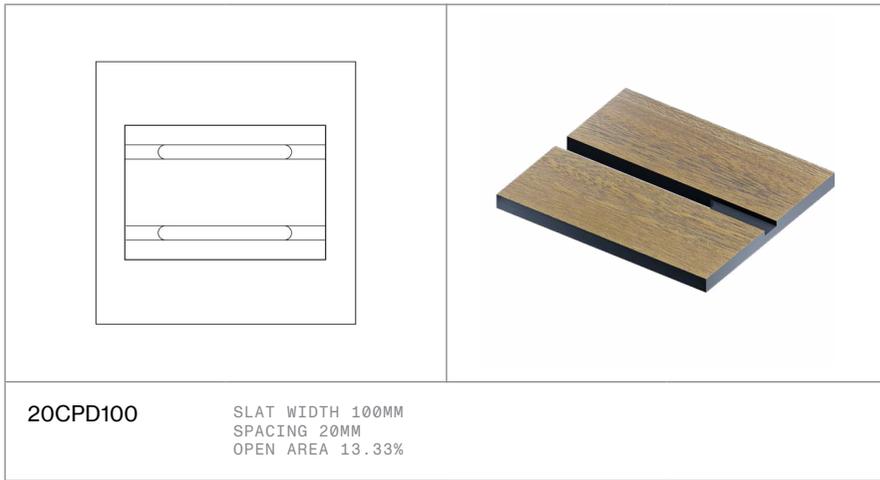

02 – FINISHES

We have a large range of finishes available for Eagle and we are constantly optimising the range by adding and removing options. Please visit the finishes section on our website for the most up to date collection. FSC® options are available upon request.

[View Finishes Online](#)

03 – SUBSTRATES



01 FIRE RATED
MDF



02 MOISTURE
RESISTANT MDF



03 FSC® MDF



04 FIRE RATED
CHARCORE MDF




05 BLACK
CORE MDF




06 FIRE RATED
BLACK CORE MDF


04 – RECOMMENDED FIXING METHODS

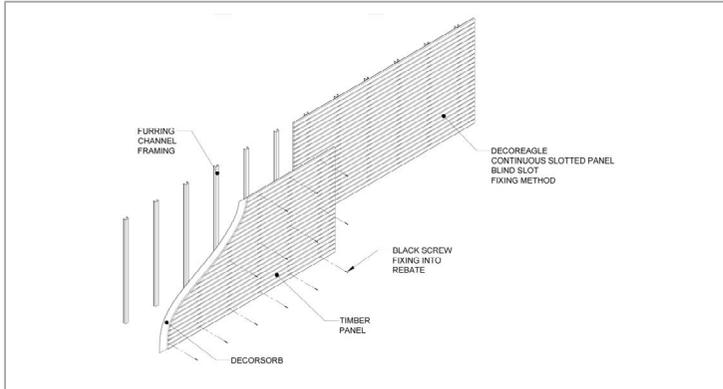

Wall & Ceiling
Blind Slot

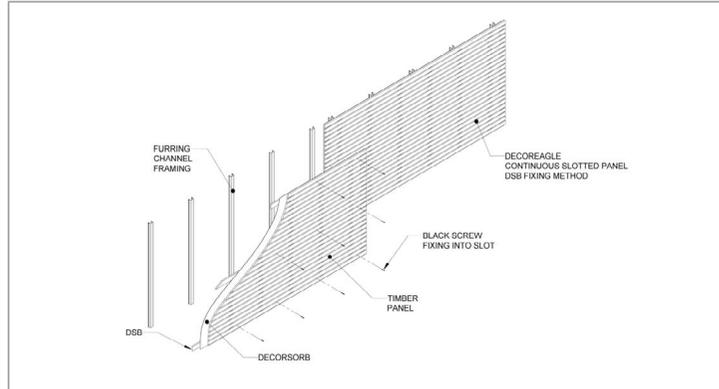

Wall & Ceiling
DSB Fixing

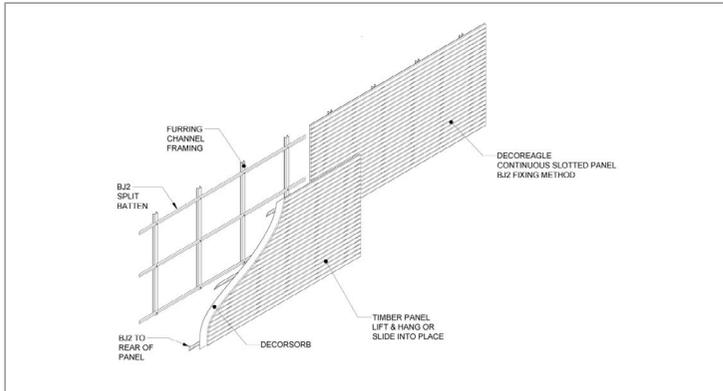

Wall
BJ2 Fixing

View the installation guidelines for each fixing system on online: decorsystems.com.au

05 – COMPLIANCE



Fire Rating GROUP 1



Acoustic Rating 0.65 - 0.75



Environmental Accreditation GECA, FSC®, AUSTRALIAN TRUSTED TRADER, FFC



Social Responsibility AUSTRALIAN TRUSTED TRADER

[View Certificates Online](#)

*Environmental accreditations may vary depending on the exact specification.

EAGLE -BUILD YOUR SPECIFICATION

Complete the table and use the details in your project specification.

PRODUCT	EAGLE	SUPPLIER	DECOR SYSTEMS - PH: 1800 835 035	
PROFILE	(CHOOSE A PROFILE FROM THE LIST ABOVE)			
FINISH	(CHOOSE A FINISH FROM THE LIST ABOVE)			
FINISH VARIATION	(E.G. AMERICAN OAK)			
SUBSTRATE	MDF			
FIXING METHOD	WALL - STEKTEK	CEILING - STEKTEK		
JOINT	EXPRESS (RECOMMENDED)	BUTT JOINT		
EDGING	MATCHING	BLACK	N/A	
BIOPANEL ZAP-X	YES	NO		
DECORINSUL	YES	NO		
FIRE CERTIFICATION	DECOREAGLE COMES WITH A GROUP 1 FIRE RATING WHEN USED WITH A SPECIFIC COMBINATION OF SUBSTRATE AND FINISH. PLEASE DISCUSS THIS WITH YOUR DECOR SYSTEMS PROJECT CONSULTANT.			
NOTES	(ANY EXTRA INFORMATION YOU WOULD LIKE TO ADD?)			
<p>This product requires an air gap and DecorInsul behind the panels for the best acoustic performance. Consult the acoustic test results, and opinion of project acoustic engineer for more details. If not available due to site constraints or budget, a 50mm gap with DecorInsul works in most cases.</p> <p>Close collaboration between Decor Systems, the project architect and the client has taken place to develop this specification. DecorEagle cannot be substituted unless agreed by Architect and Acoustic Engineer.</p> <p>Panels should be allowed to acclimatise on site for at least five days before installation. Decor Systems certificate # (Contact your Decor Systems project consultant for your individual project number) to be supplied upon completion.</p> <p>Panel installation to be as per manufacturer's instructions and AS/NZS 2785. - Installation to be done by an approved ceiling and partition contractor.</p> <p>Product guarantee to be 99 years as per Decor Systems guarantee. Please contact Decor Systems for your project specific completion number.</p>				

GET IN TOUCH

