



platon

KEEP IT DRY.

PLATON SUBFLOOR SYSTEM

Lifts the floor off damp, cold concrete and allows the concrete to breathe

SEAMLESS HDPE barrier protects floor coverings from slab moisture for a floor that is comfortable, healthy, warm and dry.

Its like having an "above grade" floor !




Step 1

- Remove existing floor coverings
- Level low areas if required
- Clear organic debris




Step 2

- Unroll first strip of Platon DIMPLES DOWN
- Cut to length
- Cut off smooth tab

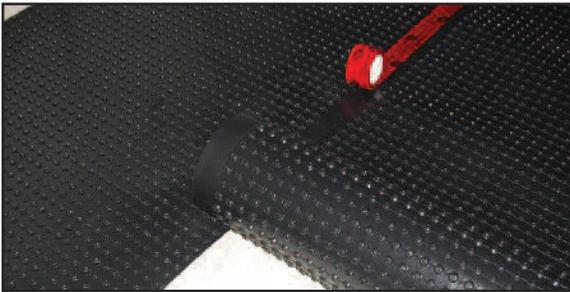

Step 3

- Install second strip of Platon
- Smooth tab overlaps 2 rows of dimples on adjacent strip.
- Tape seam with "housewrap" tape

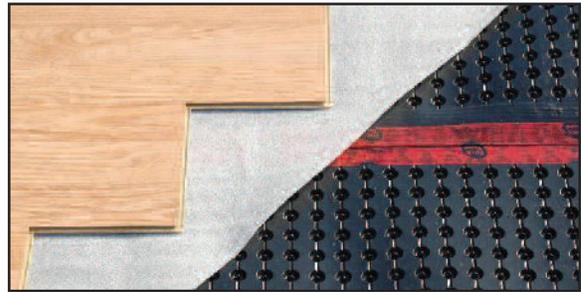

Step 4

- Laminate underpad and flooring is installed directly over Platon
 - Outperforms "dampproof" underpad
- Follow Laminate manufacturers instructions*



Step 4 - B

- Other floor coverings require a "load spreading sheet" or subfloor
- Fit and lay the subfloor panels on the Platon
- Fasten to the concrete around room perimeter
- Also fasten where there is vertical movement



Notes

- Fasten with concrete screws or masonry nails
- Non load bearing walls may be framed on the subfloor
- Install your choice of floor covering following manufacturers "above grade" instructions