

SEKISUI FOAM AUSTRALIA

BUILDING AND CONSTRUCTION



Range includes Easy-Form™ Self Wound Expansion Joint Filler, Open Cell Backer Rod, Closed Cell Backer Rod Trade Packs, Sof-Form™ Pipe Sleeve, Purlin Tape, Easy-Seal™ and more.


SEKISUI

FOAM
INTERNATIONAL
Global Foam Solutions

PHYSICALLY
CROSSLINKED
SEKISUI TECHNOLOGY

EASY-FORM™

THE NEW ADHESIVE EXPANSION JOINT

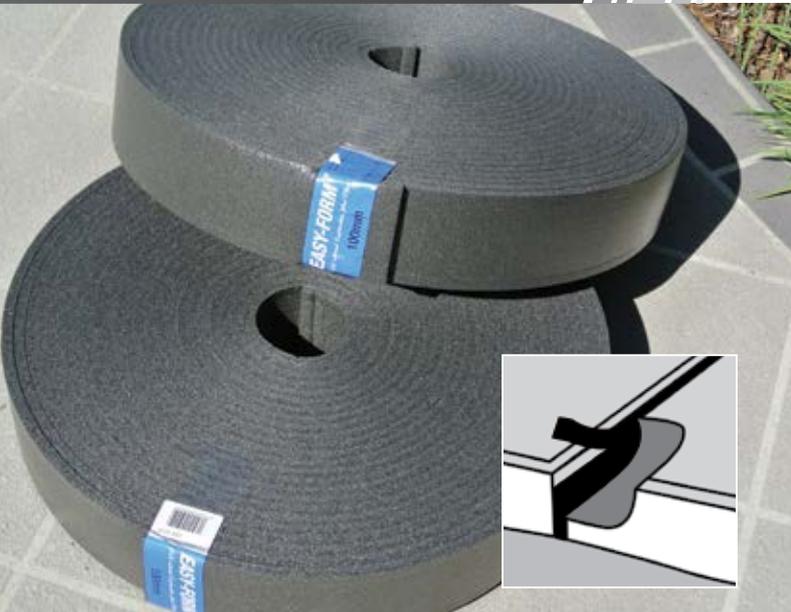

Benefits

- Cost savings: in material, time and the overall project.
- Reduced labour time: due to the ease of installation.
- No mess to attend to! (Self-wound and “paperless”).
- Easy to store.
- Easy to transport.
- No release liner.

Size Availability

Easy-Form™ is available in:

Roll Lengths: 10m and 25m rolls.

Thickness: 10mm.

Widths: 50mm, 75mm, 100mm, 125mm, 150mm, 200mm, 250mm and 300mm.

Features

Continuous Rolls

A unique one piece extruded foam with no laminations or joins.

Closed Cell

Non absorbent and impervious to most liquids.

Crosslinked

Superior compression and recovery properties vital to ensure a good joint filler.

SOF-FORM™

EXPANSION JOINT FILLER



Benefits

All SOF-FORM™ Products

Continuous Rolls

A unique one piece extruded foam with no laminations or joins.

Closed Cell

Non absorbent and impervious to most liquids.

Crosslinked

Superior compression and recovery properties, vital to ensure a good joint filler.

- Excellent weatherability and resistance to ultra violet light.
- Highly resistant to temperature, acids, alkalis, oils and solvents.

Size Availability

Available in 25 metre rolls in 10mm thickness.

- Standard stock widths are 50mm, 75mm, 100mm, 125mm, 150mm, 200mm, 250mm and 300mm.
- Thicker sizes from 15mm to 100mm are also available; with 15mm to 30mm thicknesses supplied in rolls and 40mm to 100mm thicknesses supplied in 2400mm length sheets.

SOF-FORM™ Adhesive

Reduces Job Time: supplied with one-sided Acrylic Adhesive for faster installation.

Easy To Use: light, flexible and easily cut and fabricated on site with a sharp knife Plus it is zipped for easy on site clear off.

Very Clean: will not bleed, mark and effect other products during storage.

CLOSED CELL BACKER ROD

CLOSED CELL POLYETHYLENE FOAM ROD



Benefits

- Closed cell structure.
- CFC free.
- Excellent dimensional stability.
- Resistant to most chemicals.
- Non toxic and odourless.
- No adhesion to sealants.
- Rot proof, excellent ageing characteristics.
- Available in FR grades.
- Available in customised shapes.

Trade Packs

Profiles: 6mm, 10mm, 13mm, 15mm, 20mm, 25mm, 30mm.

Roll Length: 50m.

Profiles: 40mm & 50mm

Strip Length: 2m - **Packs Qty:** 10x2m Strips.

Bulk Packs

Available in 6mm, 10mm, 13mm, 15mm, 20mm, 25mm, 30mm, 40mm and 50mm.



OPEN CELL BACKER ROD




Uses

- Vertical and horizontal joint filler.
- Window glazing seals.
- Sealing interior wall joints.
- Panel wall.
- Masonry expansion joints.
- Pre-cast units.
- Curtain wall construction.
- Ideal for use with One Part Sealants.

Profiles

Profile	Roll Length
10mm	200m
15mm	150m
20mm	100m
25mm	80m
30mm	60m
40mm	30m
50mm	20m

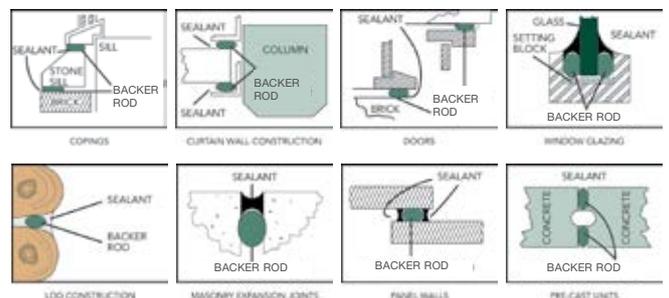

PURLIN TAPE

CLOSED CELL FOAM TAPE



Benefits

- For use on Purlins, Battens or Noggings.
- Easy to install.
- Reduces thermal movement noises.
- Eliminates the creaking noises from the effect of expansion and contraction.
- For effective use on houses, sheds, warehouses, garages and patios.
- Crosslinked PE foam.
- Adhesive one side.

Roll Size: 24mm x 3mm x 20m.

Pack Qty: 12 rolls.

Features

Foam Tape is a closed cell electron beam crosslinked, polyolefin foam with self wound adhesive backing. It incorporates Softlon® foam with an acrylic transfer tape.

Product Features:

- Softlon has an outer skin on both faces, and exhibits consistent thickness and density.
- The acrylic-based adhesive provides good holding power with no long-term deterioration.
- Self wound for easy use, and roll stability.
- The foam is free of heavy metals, plasticisers and CFC's.

SOF-FORM PIPE

LAGGING SLEEVE



Benefits

Stock lines

- 114id x 10mm wall x 6m.
- 114id x 40mm wall x 2m.
- 120id x 10mm wall x 6m.
- 120id x 40mm wall x 2m.

Benefits

- Quick and easy to install.
- Suit 60mm, 90mm and 100mm pipe.
- Ideal for PVC pipes and rebar applications.

Available in lengths from 2m to 100m and in other ID's on request - minimum order quantities apply.



General Pipe Lagging

Roll Sizes: 4mm x 50mm x 25m.
4mm x 100mm x 25m.



EASY-SEAL™

CLOSED CELL FOAM



Features

- High performance, self-expanding, fine closed cell foam.
- Excellent compressible qualities.
- Easy and clean to install and handle.
- National distribution.

Application Process


Firstly confirm the suitability for Easy-Seal™ for the area of concern. Easy-Seal™ is suitable for gaps and openings such as roof joints, expansion joints, doors, windows and back channelling and can be used internally and externally. Identify the width, length and thickness of the product required for the area to be sealed. Ensure to select the correct product thickness to achieve maximum seal. Prior to installing Easy-Seal™ ensure the surface area to be sealed is clean.

Product Range

Carton Codes	Product Specifications	Pack Qty
1A	W20mm x T20mm x L2m	4 rolls
2A	W20mm x T20mm x L7.6m	4 rolls
1B	W25mm x T12mm x L2m	4 rolls
2B	W25mm x T20mm x L7.6m	4 rolls
1C	W25mm x T20mm x L2m	4 rolls
2C	W25mm x T20mm x L7.6m	4 rolls
1D	W25mm x T25mm x L2m	4 rolls
1E	W40mm x T20mm x L2m	4 rolls
1F	W50mm x T25mm x L2m	4 rolls
1G	W55mm x T12mm x L2m	4 rolls
2G	W55mm x T12mm x L7.6m	4 rolls

EASY-FORM™ CAULKING

OPEN CELL CAULKING STRIPS AND DONUTS

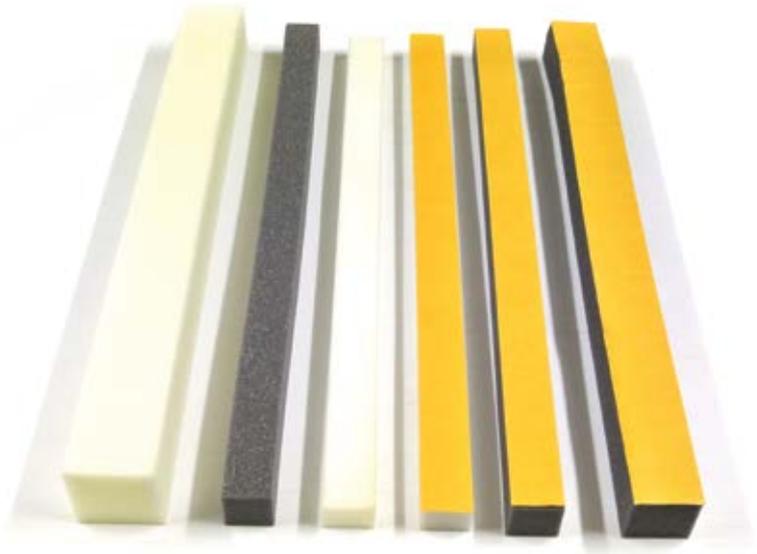

Donuts

	Units/ Bundles	Units/ Pallets
1150D x 60mmID x T35mm: 29-400 Plain	250	6000
1150D x 60mmID x T35mm: 29-400 Adhesive	450	3600
1000D x 60mmID x T55mm: 29-400 Adhesive	250	600

Caulking Strips

	Units/ Bundles	Units/ Pallets
W30 x T30 x L2000mm: 29-400 Plain	200	4400
W30 x T30 x L2000mm: 29-400 Adhesive	200	4400
W40 x T40 x L2000mm: 29-400 Adhesive	150	3840
W30 x T20 x L2000mm: 31-320 Plain	500	6000
W30 x T20 x L2000mm: 23-130 Adhesive	300	4800
W30 x T20 x L2000mm: 29-400 Adhesive	300	4800
W40 x T25 x L2000mm: 23-130 Plain	200	4000
W40 x T25 x L2000mm: 16-100 Plain	200	4000

Other sizes available on request.



SOFTLON® F-SERIES

STRUCTURAL NOISE ISOLATION



Benefits

- Excellent mechanical properties.
- Very lightweight.
- Non-toxic and environmentally friendly.
- Very easy to cut and fit.
- Excellent thermal insulation.
- Wide temperature resistance – from -80°C up to 80°C.
- Negligible water absorption.
- Low water vapour transmission.
- Excellent chemical resistance.
- Good weathering resistance.

Structural Noise and Vibration Isolation

The Softlon® F-Series provides solutions to problems of structural born noise and vibration. The closed cell structure prevents water from being absorbed, eliminating the problems of mould growth in, and freeze fracture around, joints. The compression characteristics assist loads, and therefore vibration, to be isolated. Softlon® F-Series does not rot, and is highly resistant to chemical and climatic degradation.

Product Range

Product	Thickness	Width	Length
Softlon-F5	2 to 60mm	1.2m	2.4m
Softlon-F10	6 to 60mm	1.2m	2.4m
Softlon-F25	3 to 40mm	1.2m	2.4m

Other widths and lengths subject to order.

Other thicknesses up to 150mm on application.

EASY-KNEEL™

HARDY, DURABLE KNEEBOARD



Benefits

Increased comfort and reduced soreness!

- Comfortable support.
- Knee protection.
- Lightweight.
- Mobile.
- Non slip.
- A full foam base reduces cracking.
- Washable.
- Easy to store.
- For use in concreting, gardening etc.
- Flexible handles.

Size: T40mm x W490mm x D330mm.

Carton Qty: 10.



EASY-FORM™ STIFFJOINT

RIGID EXPANSION JOINT



Easy-Form™ Stiffjoint is a closed cell, fire-retardant compression resistant polyolefin foam with an outer skin. The foam is free of heavy metals and plasters and CFCs.

Uses

For use in forming expansion joints in concrete, brickwork and pathways, and in the construction of water retaining structures.

- Pathways.
- Brickworks.
- Retro projects.
- Basement structures.
- Irrigation channels.
- Bridge works.

Advantages

- Bitumen free.
- Heat resistant up to 140°C.
- Closed cell - non-absorbent.
- Resilient.
- Rot proof.

Stock Lines

Sheet Size: T10mm x W1030mm x L2.4m.

Pack Qty: 10 lengths (50mm—20 lengths).

Profiles: 50mm, 75mm, 100mm, 125mm & 150mm

Special sizes available on request.

SOF GUARD™

FLOOR PROTECTION SHEET



Sof-Guard™ the floor protection sheet is a composite protection medium comprising closed cell cross linked foam with one face thermally fused to a strong Polyfabric weave, this laminate is tough and durable. It is also free of heavy metals, plasticisers and CFC's.

Applications

It is for the use of protecting many types of surfaces such as:

- Polished granite and marble finishes.
- Various tiled surfaces.
- New carpets.
- Timber floors.
- Kitchen and bathroom bench tops.
- Protection of waterproofing membranes.
- Plus many other varied applications.

Features

- Will not decay or rot.
- Excellent chemical resistance.
- High abrasion resistance.
- Acts as a water barrier.
- Easy to cut.
- Fast installation.
- Lightweight and easy transportation.

Product Specifications:

T2mm x W1200mm x L20m rolls.

Coverage: 24m².

Carton Qty: 6 rolls.

SEKISUI FOAM AUSTRALIA

BUILDING AND CONSTRUCTION



SEKISUI

**FOAM
INTERNATIONAL**
Global Foam Solutions

**Sekisui Foam Australia
Head Office**

1-5 Parraweena Rd, PO Box 2898,
Taren Point NSW 2229 Australia

Tel: +61 2 9525 9880

Fax: +61 2 9525 8004

Email: info@sekisuifoam.com.au

Web: www.sekisuifoam.com.au

Queensland Branch

15/853 Nudgee Rd, PO Box 448,
Northgate QLD 4013 Australia

Tel: +61 7 3267 7100

Fax: +61 7 3267 7166

Email: info@sekisuifoam.com.au

Web: www.sekisuifoam.com.au

