

# TA19

series



## Product Segments

- Comfort Motion

Voltage of motor	12V DC or 24V DC
Maximum load	1,000N in push/pull
Maximum speed	57.0mm/s
Minimum installation dimension	stroke/2+160mm
Option	Hall sensor(s)




P: 07 3297 9797 | E: [info@techome.com.au](mailto:info@techome.com.au) | W: [www.techome.com.au](http://www.techome.com.au)

We can control and automate ANYTHING

Drawing

Standard Dimension

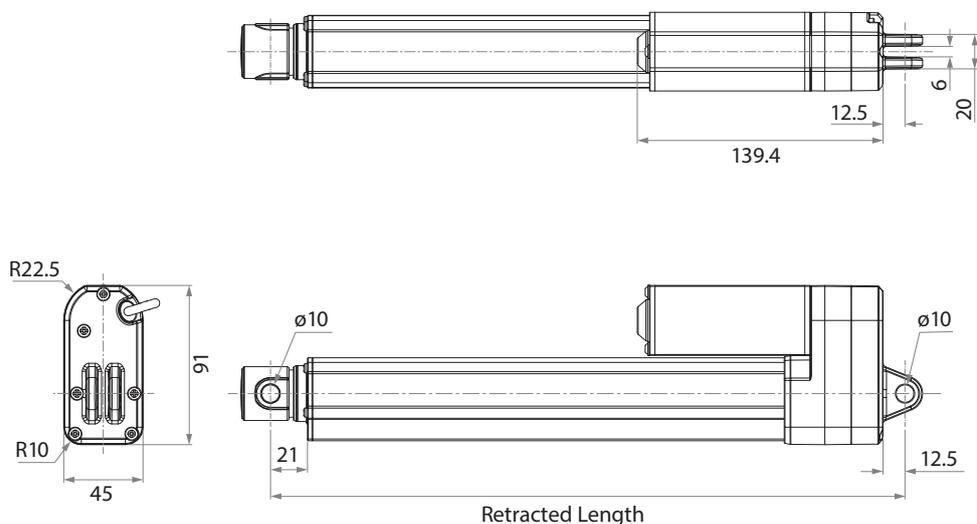

Load and Speed

CODE	Rated Load		Self Locking N (PUSH)	Typical Current at Rated Load (A)	Typical Speed	
	PUSH N	PULL N			No Load (32V DC) mm/s	Rated Load (24V DC) mm/s

Motor Speed (3800RPM)

A	600	600	2000	3.2	57.0	26.0
B	1000	1000	2000	3.2	27.0	12.0

Terms of Use

The user is responsible for determining the suitability of TecHome products for a specific application.

Due to continuous development in order to improve our products, TecHome products are subject to frequent modifications and changes without prior notice.

TecHome reserves the right to discontinue the sale of any products displayed on its website or listed in its catalogue or other written materials drawn up by

Minimum Retracted Length

TecHome.

Stroke

20~300mm	Stroke/2+160mm
----------	----------------