



Culino  
Dual Mixer





# Culino™ can perform in your kitchen

The new **Culino™ Dual Mixer**, a sink mixer and filtered water tap all-in-one, offers new levels of function and simplicity in the kitchen.

Imagine just one clever mixer performing two essential functions for that clean, minimalist look... With an ample supply of sparkling, fresh tasting water for drinking, food preparation, cooking etc at the flick of a lever, the Culino™ Dual Mixer becomes a performance culinary tool.

The Culino™ Dual Mixer comes in bright, mirror polished chrome or stylish brushed chrome finish and features ceramic disc valve technology for a smooth, durable action. Precision built in Australia using the best materials, the Culino™ Dual Mixer complies with Australian Standards AS/NZS 3718 and the WELS regulation, carrying a five year guarantee.



Brushed Chrome finish option

# Healthy, sparkling water

## Compact, convenient quick-change filter

A truly modern and high performance composite carbon block filter system supplied with the Culino is quick to fit, compact and easy to maintain. This neat unit fits inside the cupboard and shares the cold water supply with the Dual Mixer. Replacement cartridges are readily available and the auto shut-off head means they are very easy to change.

This filtration system features:

- Single sanitary quick-change design.
- Compact configuration.  
Space required approx 410mm (H) x 85mm (W).
- Fast, 5lpm flow rate through 5/16" tubing.
- Can be mounted up to 60° from vertical.  
Space required approx 190mm (H) x 410mm (W).
- Outstanding filter capacity of up to 37,854L \* (NSF 42).
- Economy and low maintenance.
- Multi-function control valve providing back-flow prevention, pressure limiting and anti-hammer protection.


## Composite carbon block filter cartridge

Watermark certified 1µm cartridge reduces:

- Sand, silt, particulates and rust.
- Chlorine, offensive tastes and odours.
- Giardia, cysts and cryptosporidium.

## Installation & Operation

The Culino™ Dual Mixer can be fitted through a sink or benchtop. The sink mixer operation is as normal by means of the main handle and water flows from the aerator at the end of the swivel spout. The valve incorporates an anti-scald adjustment ring and a flow limiting screw. The purification system connects to mains cold water and uses the same supply fitting as the Dual Mixer (**water to be microbiologically safe**). Filtered water is controlled by the pin knob at the base of the Dual Mixer and flows from the second outlet.

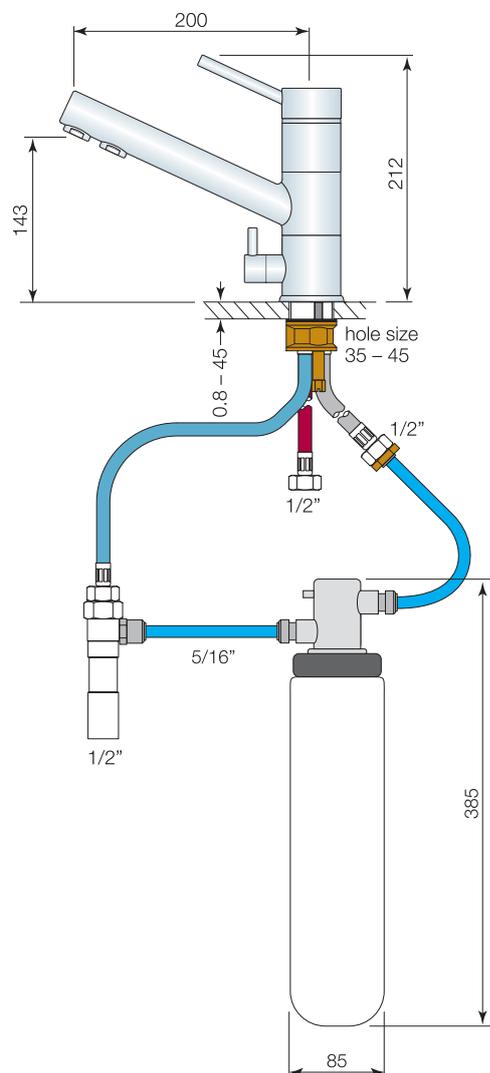

### Technical Specifications

Tap hole size:	<b>35 – 45mm</b>
Bench thickness:	<b>45mm max.</b>
Sink thickness:	<b>0.8mm min.</b>
Supply Pressure:	<b>100 – 1000 kPa (500 kPa optimum)</b>
Hot Water Temp.:	<b>70°C max.</b>
Cold Water Temp.:	<b>4.4 – 38°C</b>
Flow rate, mixer:	<b>nom. 9 lpm max.</b>
Flow rate, filter tap:	<b>nom. 5 lpm max.</b>
Supply fittings:	<b>1/2" BSP</b>

The Culino™ Dual Mixer is **WaterMark** certified to **AS/NZS3718**, **AS/NZS4020**, **AS/NZS6400** and is built in Australia under **Faucet Australia's licence No. WMKA 002459**.



NOTE: Cold supply to be fitted with approved mini stop incorporating removable line strainer. Purification system supplied with multi-function control valve incorporating back-flow prevention, pressure limiter and anti-water hammer.

Faucet Australia  
Factory 2, 21 Tate Drive  
PO Box 271  
Kerang Vic 3579 Australia  
Phone: + 61 3 5450 4236  
Facsimile: +61 3 5450 4420  
Freecall: 1800 505 116

