



Product Reference:
SA302

Sanifos® 610 SLD

The Sanifos® 610 SLD 700 is a packaged pumping station for single dwelling use is an efficient solution where gravity a reliant storm water systems is not possible due to limited site access and site constraints such as property sloping away from the main storm water infrastructure.



SA302

WHY CHOOSE THIS PRODUCT?

Ideal for single dwelling residential or small commercial applications

Tough reliable storm water pump

Compact space saving tank design

Engineered to Australian Standards AS1546

Wired high level alarm

Choice of optional inlet connection points


IP68 rated

Complete package ready to install. Includes internal pipework, non return and ball valve supplied.

Energy saving and reduced motor wear thanks to large working volume.

VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

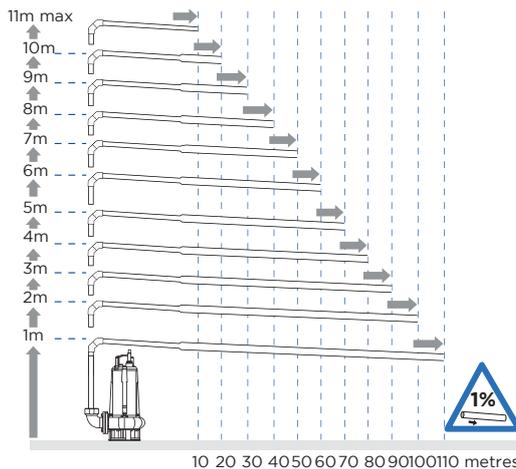

Sanipump
SLD 700



High performance twin channel impeller







Sanifos® 610 SLD

TECHNICAL CHARACTERISTICS

Discharge Pipework	40 mm
Motor Power	1100 Watts
Voltages	220-240 V/50 Hz
Tank Volume	610 L
Overall Measurements	1140 x 1000 mm
Inlet Pipework	40/50/100 mm
IP Rating	IP68
Max Discharge	583 L/min

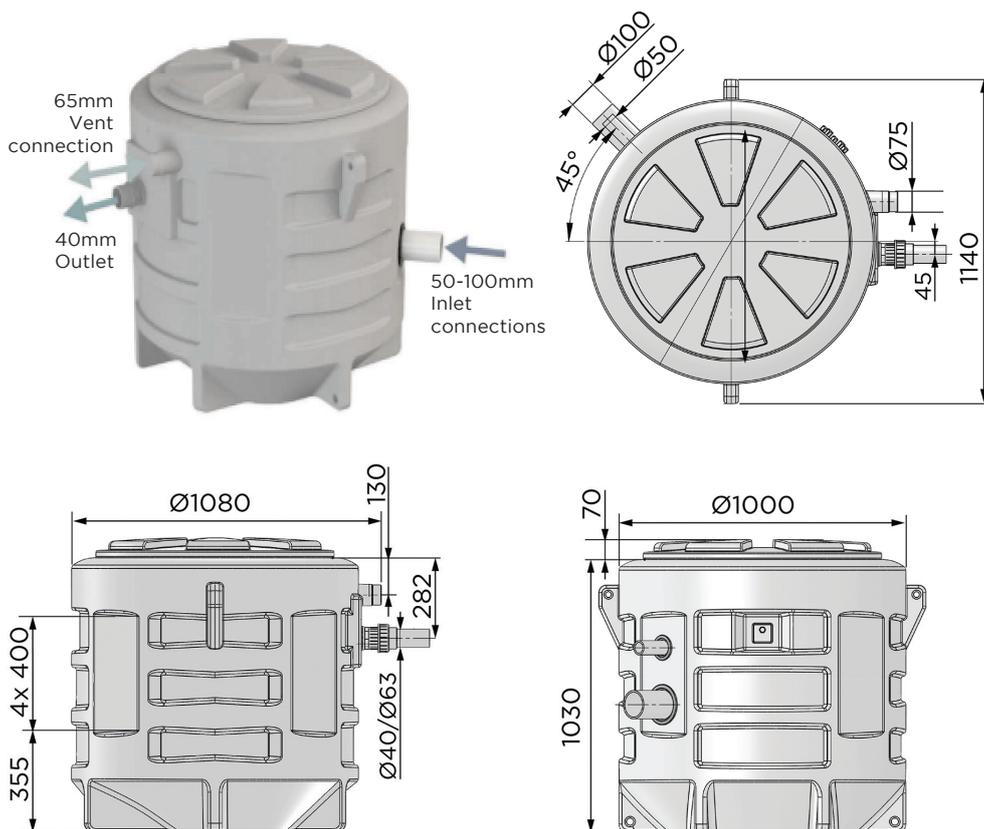


Comes with wired high level alarm



Optional tank extension ring

FLOW RATE PERFORMANCE CHART

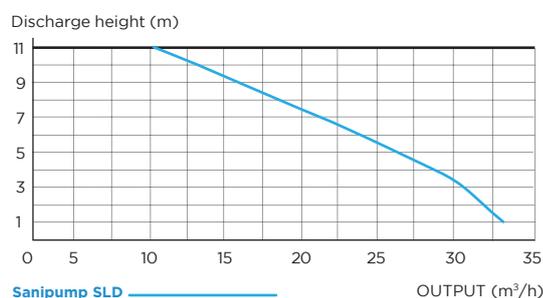

Made in France to the highest standards, needs to be installed by a licensed plumber