# LED/FLOOD LIGHT

GEN- X series

#### **NEW AGE IN LED IS HERE!!**

LED ECO Lighting, we are committed to providing you with newest and technologically advanced concepts available. We produce the most energy-efficient, money savings, providing you with the newest LED lighting on the market!

We are proud to offer you our exclusive,
Super-HighBrightness, 160 LM/W LED Flood Light!
Best Energy Efficiency, Best Quality, COMPETATIVE PRICE!



#### LEDECO LIGHTING

260 Prospect road prospect SA 5082 Ph.

(08)84324900

Website: www.ledecolighting.com.au Email: sales@ledecolighting.com.au







**Equipped with** toughened glass, High performance and safety



UNIQUE SMD PACKAGE



95W=160W Bridgelux normal led floodlight

135W=220W Bridgelux normal led floodlight

Professional Quality at an UNBEATABLE PRICE!

Meanwell driver Safer, longer operating life, Higher efficiency rating


















# GOOD HEAT DISSIPATION TECHNIQUES



Our Heat sink is specifically designed with special material that dissapates an enormous amount of heat very quickly.


The Heatsink controls the temperature of lamp, 55°C through heat conduction, heat convection, heat radiation. It allows the LED chips to achieve its highest performance, lower light decay, and long-lifespan.





# SPECIFICATION



Model	Power	Voltage	Power factor	Light color	Luminous	ССТ	CRI	D	w	н
FLX75W	75W	100-240V	>0.95	Warm white Pure white Cool white	11250 LM 11625 LM 11850 LM	2700-3300K 3800-4600k 5500-6500K	80	251mm	122mm	269mm
FLX95W	95W	100-240V	>0.95	Warm white Pure white Cool white	14250 LM 14725 LM 15010 LM	2700-3300K 3800-4600k 5500-6500K	80	255mm	123mm	354mm
FLX135W	135W	100-240V	>0.95	Warm white Pure white Cool white	20250 LM 20925 LM 21330 LM	2700-3300K 3800-4600k 5500-6500K	80	294mm	144mm	433mm

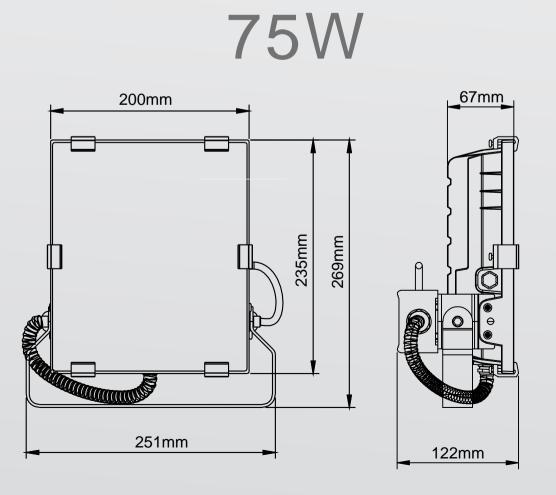

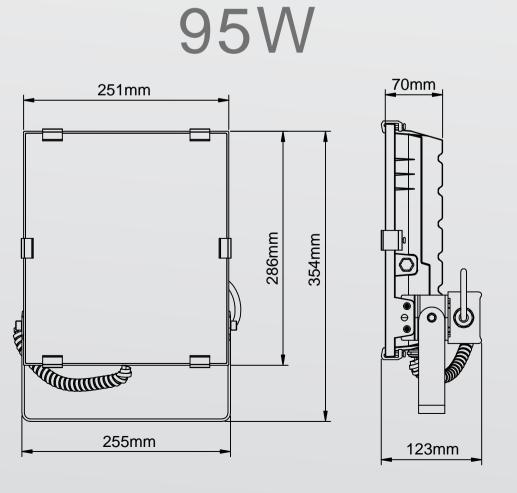

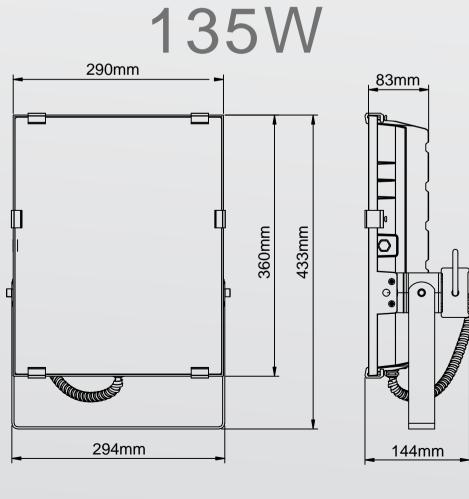

### LIGHT DISTRIBUTION &LUX

