

DOUBLE HUNG WINDOW RESTRICTOR (DS259)

-DOUBLE HUNG WINDOW LIMITER ASSEMBLY AND COMPONENTS




PRODUCT ASSEMBLY


1. Using the *Mount Plates* as a reference, mark two centre holes at the desired distance.
- 2a. Drill all holes* and fix the *Mount Plate* to the sash using 2 screws*.
NB: Ensure the flat face is positioned away from the engaging sliding sash.
- 2b(optional). Repeat this process to the opposing side, ensuring that the *Mount Plate* for the bottom sash has the flat face positioned away from the bottom sash.
3. On the bottom of the sash, use the *DS259 - Double Hung Restrictor* to mark both centre holes on the exterior face. NB: When drilling, ensure you allow clearance so the drill bit does not come into contact with the glass. When positioned correctly, the *DS259 - Double Hung Restrictor* will pass over the *Mounting Plates* when fixed. Drill both holes* and fix the *DS259 - Double Hung Restrictor* to the sash using 2 screws*.
4. Slide the *Lock Units* onto *Mount Plates*, turn key 180° to the locked position and remove the key. NB: Ensure the *DS259 - Double Hung Restrictor* is below the lower *Lock Unit*.

Note*

- Image numbers refer to steps
- All holes to be drilled at 2.8mm
- All screws to be 6G countersunk stainless steel.

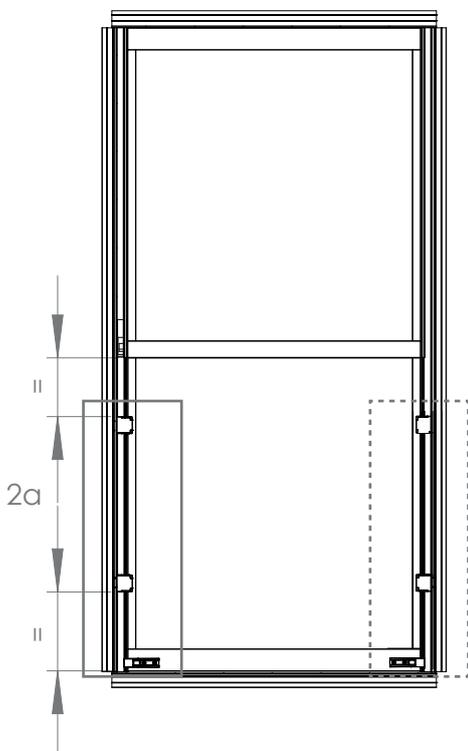



2b: Optional
(recommended for windows with a large amount of window tilt)

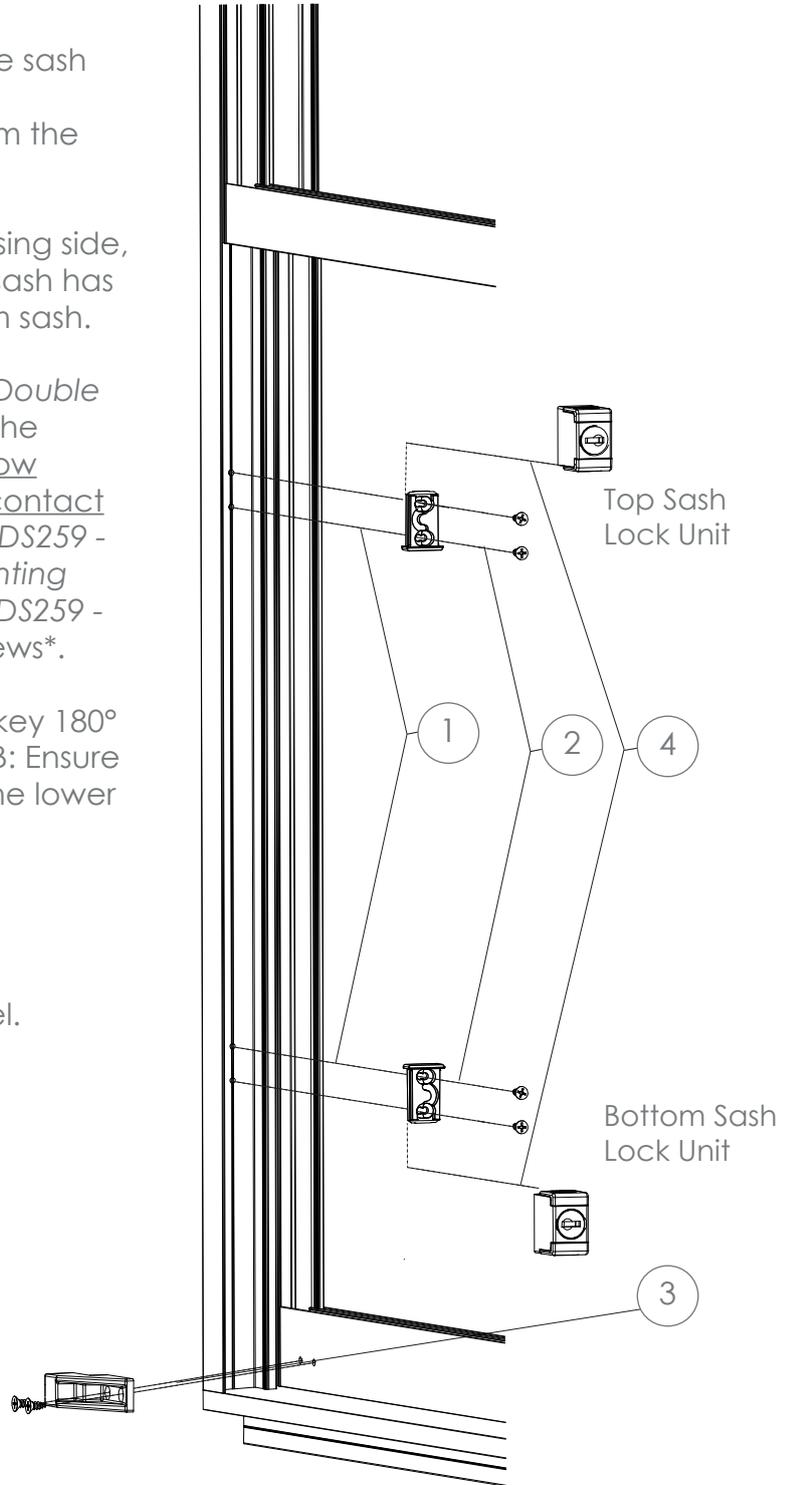



Correct positioning of Double Hung Kit components

PRODUCT COMPONENTRY (NOT TO SCALE)



DS259 -
Double Hung
Restrictor (x1)

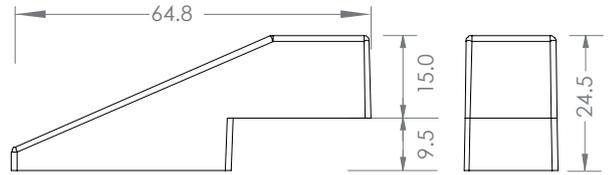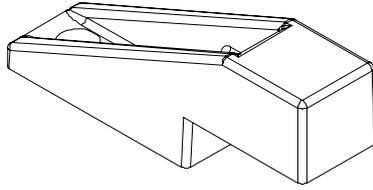

Mount Plate (x2)

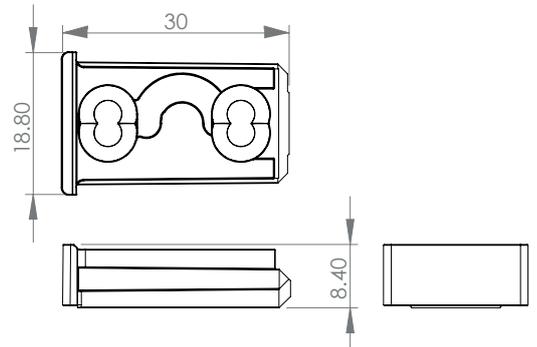

Lock Unit (x2)

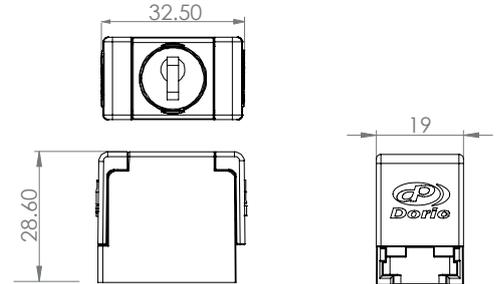

Fixing Screws (x6)

6G x 12Lg



PRODUCT DISCLAIMER

Use of DS259 to satisfy the Industry Code of Practice-Protection of Openable Window Testing Specification, requires that the installer has tested all windows using a certified testing device with the product installed.

The use of the product must be in accordance with all manufacturing specification and hardware fitting instructions.

Warranty of product is void if installation instructions are not adhered to.



38 Redfern St
Wetherill Park NSW 2164
Australia
Ph : 1300 132 389
sales@doric.com.au
www.doric.com.au