



Sanifos® 1000

The Sanifos® 1000 packaged pumping station is designed for large-medium residential or commercial use and is an efficient solution where gravity reliant sewerage or stormwater systems are not possible due to limited site access and site constraints such as property sloping away from the sewer and stormwater infrastructure.



WHY CHOOSE THIS PRODUCT?

Ideal for larger single dwelling residential or commercial applications

Choice of 3 high performance pumps to suit your project

Compact space saving tank design

Engineered to Australian Standards AS1546

Pump controller or high level alarm options

Choice of optional inlet connection points

Working temperature of 70°C max for short periods


IP68 rated

Complete package ready to install. Includes dual pumps internal pipework, non return and ball valve supplied

Energy saving and reduced motor wear thanks to large working volume

VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

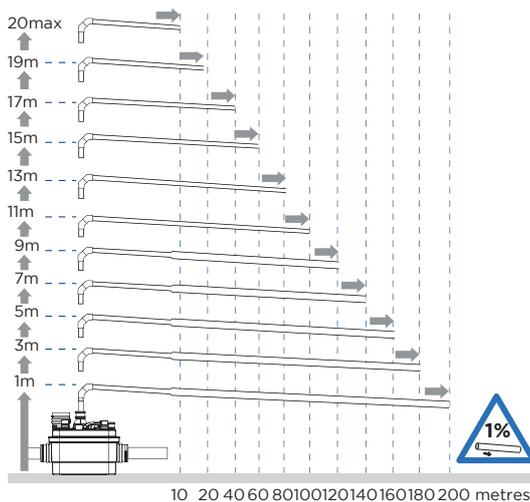

APPLICATIONS



TOILET



HAND BASIN



BATH



SHOWER



WASHING MACHINE



DISH WASHER



KITCHEN SINK



STORM WATER

Product Reference: SA301

Sanipump Cutter



Robust blade suitable for standard usage

Sanipump ZFS 71



Heavy duty adjustable cutter for intense usage

Sanipump SLD 700




High performance twin channel impeller



Shaking up water

Made in France to the highest standards, needs to be installed by a licensed plumber

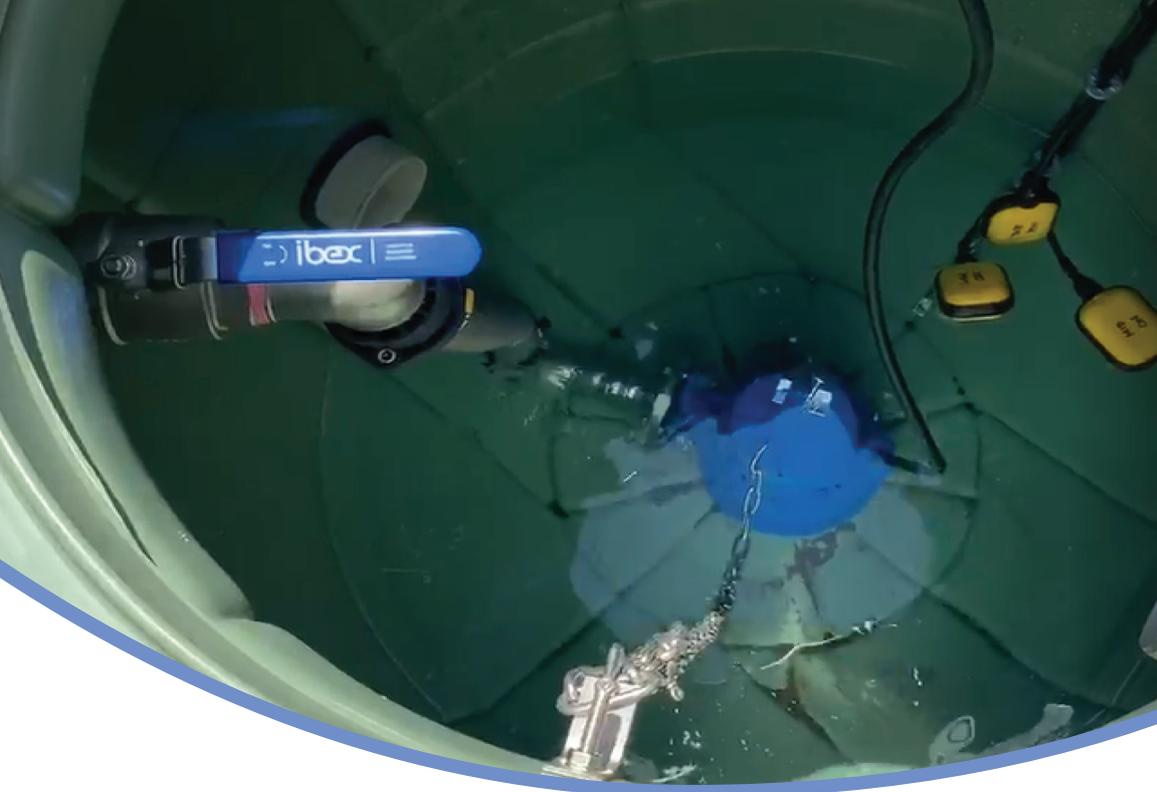

APPLICATIONS



TOILET



HAND
BASIN



BATH



SHOWER



WASHING
MACHINE



DISH
WASHER




KITCHEN
SINK



STORM
WATER


SANIFOS 1000

Product Reference:
SA301

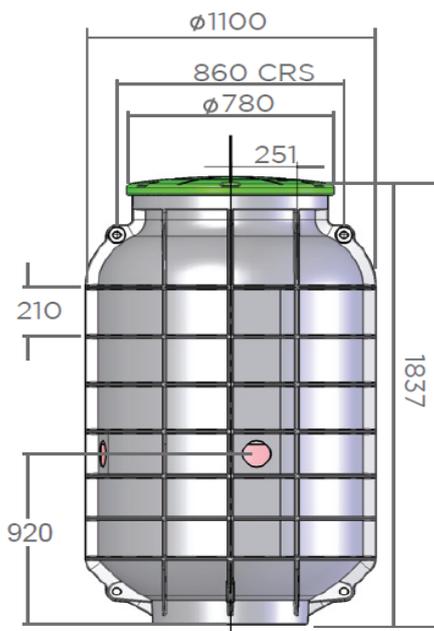

TECHNICAL CHARACTERISTICS

Discharge Pipework	40 mm
Motor Power Sanipump Cutter	1500 Watts
Motor Power Sanipump SLD 700	1100 Watts
Motor Power Sanipump ZFS 71	2200 Watts
Voltages	220-240 V/50 Hz
Tank Volume	1000 L
Working Waste Water Temp	35°C/Max 70°C (intermittent)
Overall Measurements	1837 x 1100 mm
Inlet Pipework	40/50/100 mm
IP Rating	IP68
Max Discharge Sanipump Cutter	216 L/min
Max Discharge Sanipump SLD 700 SA	583 L/min
Max Discharge Sanipump ZFS 71	266 L/min

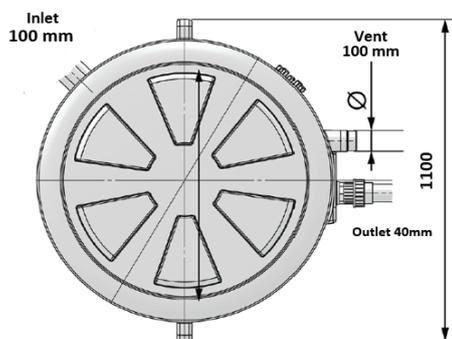

FLOW RATE PERFORMANCE CHART



Full function pump
controller with manual
override, high level
audible alarm and strobe

 **SFA** GROUP
Shaking up water

Made in France to the highest
standards, needs to be installed
by a licensed plumber